








Circuito	Descrição	Esquema	Tensão (V)	Pot. total. (W)	Fases	Pot. - R (W)	Pot. - S (W)	Pot. - T (W)	FCA	n°	Ip (mm2)	Seção Disj.	dV par (%)	dv total (%)	
1	TUE - AR COND. 1	F+F+T	220 V	2400	S+T	1200	1200	1200	0,54	22,4	12,1	4	16	1,76	3,13
2	TUE - AR COND. 2	F+F+T	220 V	2400	R+T	1200	1200	1200	0,54	22,4	12,1	4	16	1,54	2,91
3	TUE - AR COND. 3	F+F+T	220 V	2400	S+T	1200	1200	1200	0,54	22,4	12,1	4	16	1,32	2,70
4	TUE - AR COND. 4	F+F+T	220 V	2400	R+T	1200	1200	1200	0,54	22,4	12,1	4	16	1,10	2,47
5	TUE - AR COND. 5	F+F+T	220 V	2400	S+T	1200	1200	1200	0,54	22,4	12,1	4	16	0,88	2,25
6	TUE - AR COND. 6	F+F+T	220 V	2400	R+T	1200	1200	1200	0,54	22,4	12,1	4	16	0,65	2,02
13	TUE - AR COND. 13	F+F+T	220 V	2400	S+T	1200	1200	1200	0,57	21,3	12,1	4	16	1,92	3,29
14	TUE - AR COND. 14	F+F+T	220 V	2400	R+T	1200	1200	1200	0,57	21,3	12,1	4	16	1,70	3,07
15	TUE - AR COND. 15	F+F+T	220 V	2400	R+S	1200	1200	1200	0,57	21,3	12,1	4	16	1,48	2,85
16	TUE - AR COND. 16	F+F+T	220 V	2400	R+S	1200	1200	1200	0,57	21,3	12,1	4	16	1,26	2,63
17	TUE - AR COND. 17	F+F+T	220 V	2400	R+S	1200	1200	1200	0,57	21,3	12,1	4	16	1,03	2,41
18	TUE - AR COND. 18	F+F+T	220 V	2400	R+S	1200	1200	1200	0,57	21,3	12,1	4	16	0,81	2,18
TOTAL				28800	R+S+T	9600	9600	9600							

Tipo de carga	Potência instalada (kW/A)	Fator de demanda (%)	Demanda (kW/A)
Iluminação e TUGs (Escolas e semelhantes)	12,00	100,00	12,00
	52,00	50,00	26,00
Uso Específico	64,00	TOTAL	102,00

Legenda	
	Caixa de passagem
	Cotovelo reto 90°
	Quadro de distribuição
	Quadro de medição
	T horizontal 90°
	Tornada alta a 1,80m do piso

[illegible]

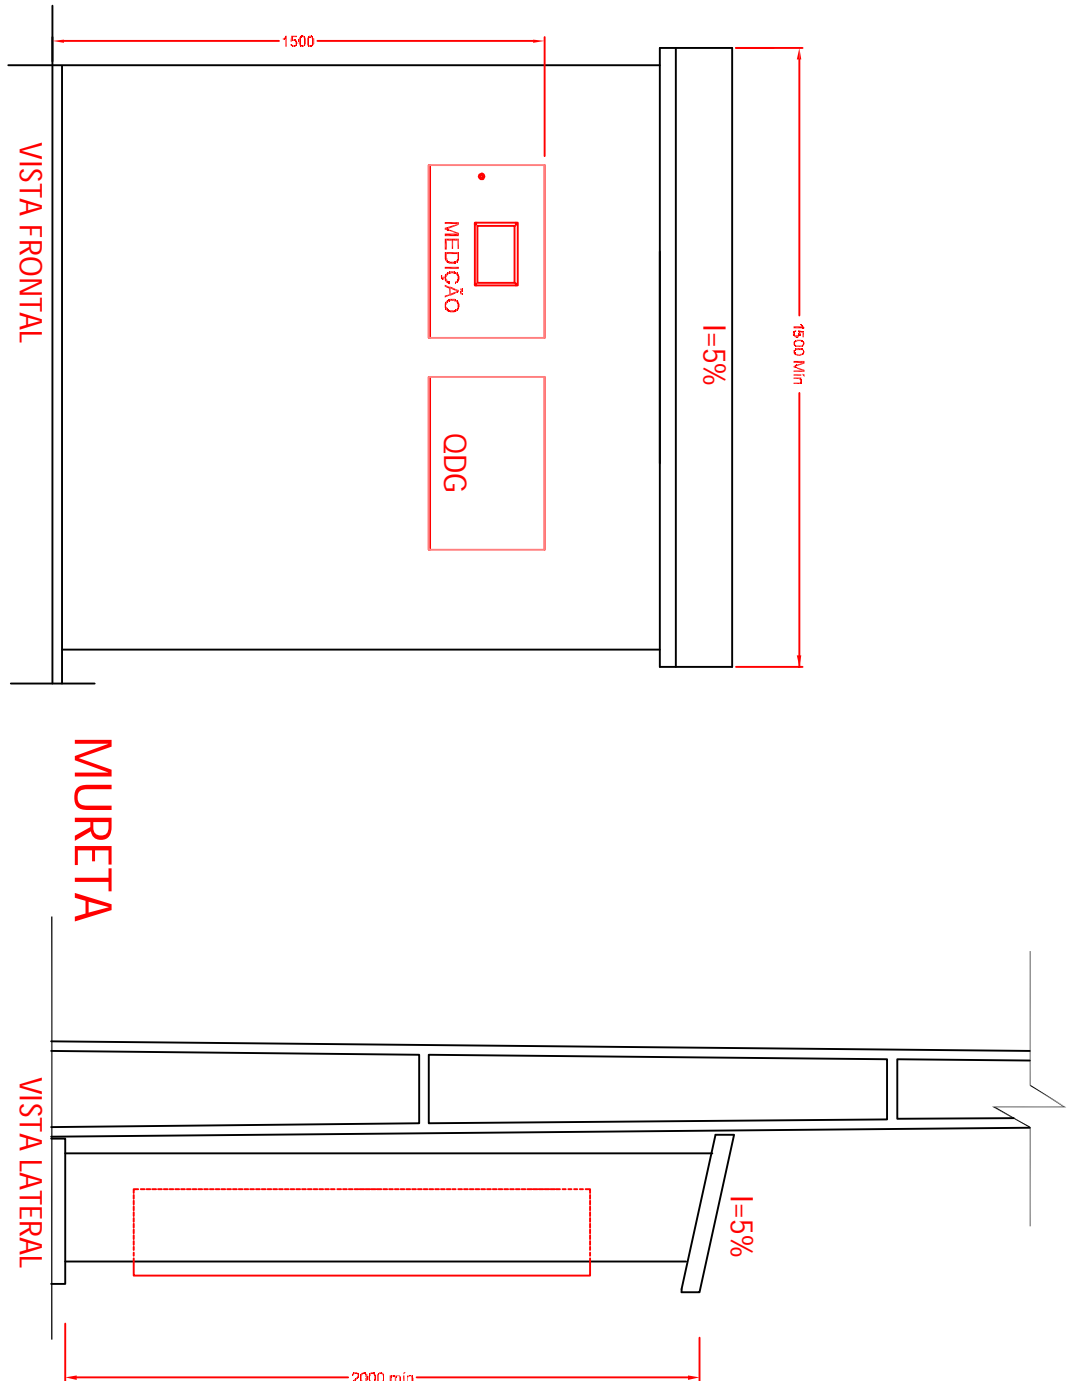

